

PLANNING AND TESTING OF A Balsa Wood Truss Bridge USING THE VARIABLE OF TRUSS WEIGHT AGAINST MAXIMUM LOAD WEIGHT

Yehezkiel Septian Yoganata^{*}, Dwi Oktavian Derian Shakti², Mohamad Fahmi Ilman³, Trival Epriadi Nugroho⁴

^{1,2,3,4} Civil Engineering, State Polytechnic of Malang, Soekarno-Hatta No.9 Malang, Indonesia

*Corresponding Author: yehezkielseptian@polinema.ac.id

ABSTRACT

The use of lightweight materials like balsa wood in prototype bridge construction has become a fascinating topic in civil engineering, especially in laboratory-scale experimental studies. This research aims to evaluate the structural performance of a prototype balsa wood truss bridge under concentrated loading. The bridge is designed with a symmetrical truss system and a main joint at the central connection, which acts as the center for force distribution. The design process was conducted using a numerical approach through structural software to analyze the axial force and bending moment under various load scenarios, namely 10 kg, 20 kg, and 30 kg. The analysis results show that the compressive and tensile axial forces, as well as the bending moments that occur, are still within safe limits based on the specifications of balsa wood's modulus of elasticity and strength. Additionally, experimental testing was also carried out on this balsa bridge prototype. Structurally, this bridge has a total weight of 25,91 grams. The test results show that the bridge can withstand a load of 30.90 kg. When compared to the weight of its structure, the bridge demonstrates good material efficiency as it can support 1,161.327 times its own weight.

Keywords: truss bridge, balsa wood, lightweight material, load

Introduction

A bridge is a transportation facility that plays a very important role in human life. [1] A truss bridge is a type of structure made of interconnected members forming a triangular pattern, which provides high stability and the ability to distribute loads efficiently. The construction materials can vary, such as wood or metal. A truss structure is composed of components arranged into triangular units — the most stable geometric shape known in construction. [2]

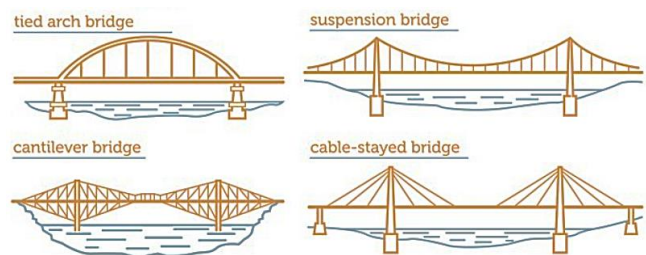
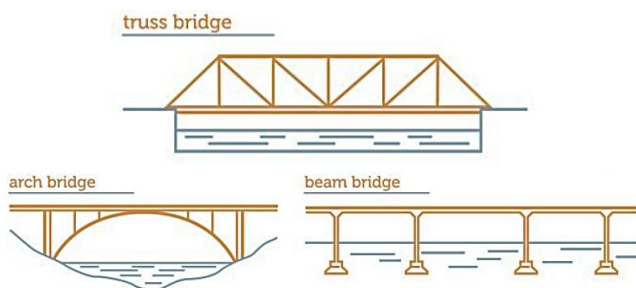


Figure 1. Kinds of Bridge Truss Shapes

Wood structure is a type of structure whose components are made of wood material. As construction technology develops, wood is increasingly used as an alternative option in various civil engineering projects. Its uses include: roof trusses, bridge frames and girders, scaffolding structures, and building elements such as columns and floor beams.[3] Wood has the advantage of being a renewable material. So far, it has been more commonly used in industries such as plywood and furniture manufacturing, while its application in bridge

construction remains relatively limited.[4] The use of wood as the main material for bridges has been around for a long time because wood is known as a potential material for connecting areas separated by rivers or ravines. Although many bridges now use materials such as steel and concrete, wooden bridges still have their place in civil engineering. However, the use of wood also has its own challenges.[5]

The quality of wood as a construction material is crucial in ensuring the strength and durability of bridge structures. A lack of quality control can lead to various problems, such as structural damage or a reduction in the material's service life.[6] In general, the wood used must be in good condition, provided that its characteristics and any defects do not damage or reduce the quality and strength of the building's construction.[7] Nonetheless, wood continues to offer a number of advantages, such as ease of cutting and processing, as well as its environmentally friendly properties, making it a promising alternative for future bridge construction.[8]



Figure 2. Balsa Wood

Balsa wood has unique characteristics that set it apart from other types of wood, namely its very light weight. It also has good flexibility and a high strength-to-weight ratio, making it a very valuable material for various purposes such as making miniature bridges, carved crafts, surfboards, model airplanes, and other creative applications.[9] Balsa (*Ochroma pyramidale*) is a type of wood known for its low density. The elastic properties of balsa wood are very important when it's used as a core material.[10] Balsa is a type of natural wood used in composite materials and is also considered an environmentally friendly material. It is known as one of the lightest commercial woods, with a low density (60–380 kg/m³) and good mechanical properties and performance.[11] One of the important things that must also be considered in a wooden structure is its **joints**. The joints must be calculated in such a way that the safety of the wooden structure is guaranteed.[12]

Materials and Methods

The steps of this research are shown in the following image.

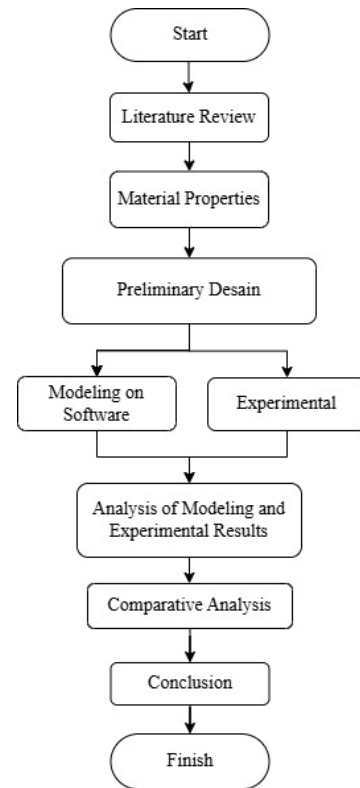


Figure 3. Flowchart

This research began with the design of a truss bridge model using balsa wood with a cross-section of 3 mm × 3 mm and a rod length of 1000 mm. The bridge has a span of 320 mm, a height of 100 mm, and a width of 68 mm. The following are the specifications of the balsa wood as the main material for the bridge:

Table 1. Identify Balsa Wood

Details	Spesification
Name	Balsa
Tree size	<i>Ochroma Pyramidale</i>
Dry wight	150 kg/m ³
Spesific Gravity	0,12 ; 0,15
Tensile splitting strength	19,6 Mpa
Elasticity	3,71 Mpa
Compressive strength	11,6 Mpa

Using the Indonesian Forest team's balsa wood identification as a reference, the minimum air-dry density of 150 kg/m³ is used. Density is defined as weight per volume divided by the weight of an equal volume of water.[13] So, its modulus of elasticity (E) can be calculated using the following equation:

$$E = 16000 \times G^{0.17} \quad (1)$$

Where:

E = Modulus of Elasticity (Mpa)

G = Specific Gravity (t/m³)

Based on the equation above, the flexural modulus of elasticity (E) can be calculated as follows:

$$E = 16000 \times 0.15^{0.17}$$

$$E = 4160.49 \text{ Mpa}$$

The material specifications used for structural analysis modeling are as follows:

Material : Kayu Balsa

Dimension : 3 mm x 3 mm x 1000 mm

G : 150 kg/m³

E : 4160.49 Mpa

Here is the translation:

The modulus of elasticity (E) for balsa wood is 4160.49 MPa. The reference modulus of elasticity for stability (E_{min}) can be determined using the equation from SNI 7973:2013, C4.2.4-1 [14], as follows:

$$E_{min} = \frac{E \cdot [1 - 1,645 \cdot COV_E] \cdot (1,03)}{1,66} \quad (2)$$

Where:

E = Modulus of Elasticity

1,03 = Correction factor to correct the value of E

1,66 = Safety factor

COV = Variation coefficient of E

We can see the coefficient of variation for the modulus of elasticity (COV_E) in SNI 7973:2013 [14] as follows:

Table 2. Coefficient of Variation (COV_E)

Variation	COV _E
Visually graded sawn timber	0,25
Mechanically evaluated wood	0,15
Mechanically stress-graded timber	0,11
Structural glued laminated timber	0,1

The value of the modulus of elasticity (E_{min}) can be calculated from equation 2.

$$E_{min} = \frac{E \cdot [1 - 1,645 \cdot COV_E] \cdot (1,03)}{1,66}$$

$$E_{min} = \frac{4160,49 \cdot [1 - 1,645 \cdot 0,25] \cdot (1,03)}{1,66}$$

$$E_{min} = 1519,86 \text{ MPa}$$

The balsa wood used has a modulus of elasticity for stability (E_{min}) of 1519.86 MPa.

This bridge truss design was inspired by an open book, where each page resembles the truss structure of a bridge. The book's structure has sharp angles and clean lines, providing a strong visual representation of how elements can connect to form a harmonious whole.

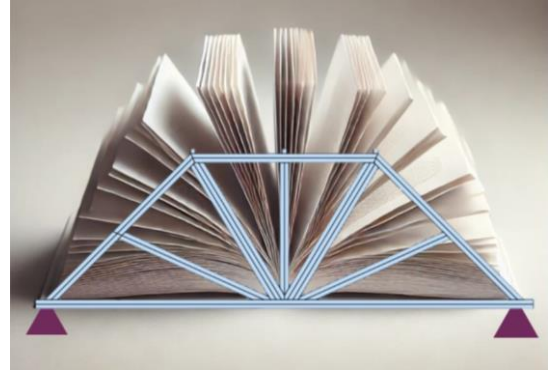


Figure 3. Truss Bridge Desain

Each open page is like a bridge truss, connecting the ideas, knowledge, and creativity into one complete whole. Here are the basic data points for planning a balsa bridge structure.

Type of bridge	: Truss
Width of the bridge	: 68 mm
Bridge span	: 320 mm
Truss height	: 100 mm
Support	: Pin - pin
Material	: Balsa wood 3 x 3 x 1000 (mm)
Connection	: Glue

The entire truss of this bridge is centered on a main joint in the middle. This innovation makes the bridge more sturdy and stable because the forces from each member are distributed evenly to a single central point. This central joint not only functions as a truss binder but also as a load distribution center, allowing the bridge to withstand larger loads with maximum efficiency.

Results

• Modeling

This bridge structure modeling uses structural analysis software. The modeling aims to model the planned structure and loads, with the output being axial forces and moments used to design the dimensions of the trusses.[15]

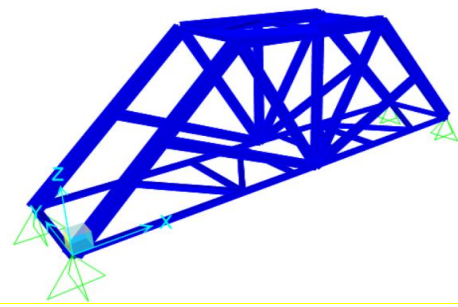


Figure 4. 3D Bridge Design Using Structural Software

In the planning, three load trials (10, 20, and 30 kg) were conducted as follows:

1. Load 10 Kg

Here is a discussion of the internal forces that occur due to a 10 kg load.



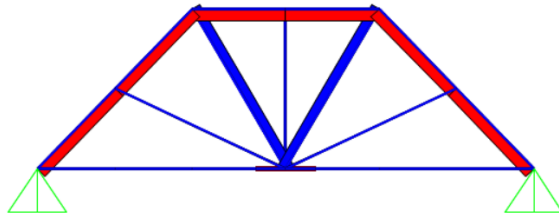


Figure 5. Normal Force (Axial) Diagram Due to Load 10 Kg

Beam with maximum axial force due to a 10 kg load with details as shown in figure 5 below.

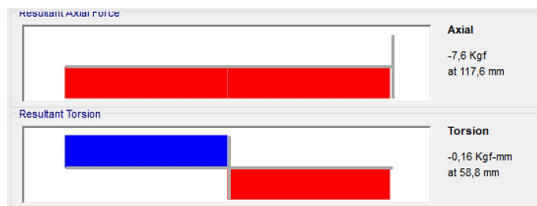

(a)

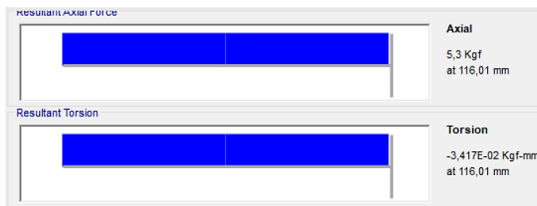

(b)

Figure 6. (a) Compression (b) Tension Due to Load 10 Kg

Based on Figure 6, the results show a maximum compressive axial force of -7.6 Kgf at a position of 117.6 mm and a maximum tensile axial force of 5.3 Kgf at a position of 116.01 mm. This indicates a small but significant compressive force on the axial axis, where the structure is experiencing a compressive force that needs to be considered for further calculations.

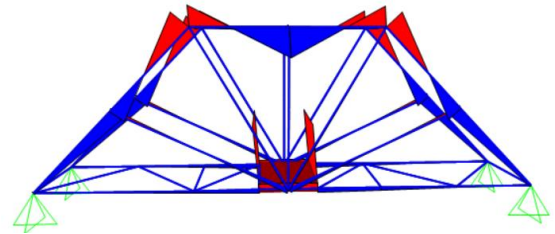


Figure 7. Moment Diagram Due to Load 10 Kg

Beam with maximum moment due to a 10 kg load with details as shown in figure 8 below.

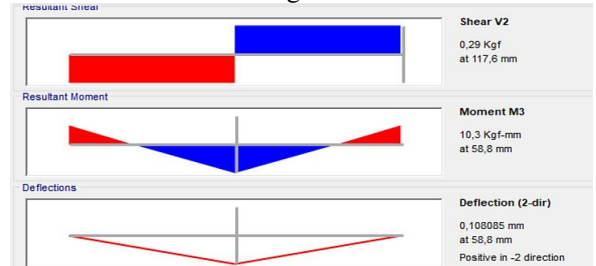


Figure 8. Maximum Moment Due to Load 10 Kg

Based on figure 8, the structure experiences a maximum bending moment of 10.3 Kgf-mm at the 58.8 mm position. Overall, the structure is able to withstand these forces well and remains within safe limits for balsa wood.

2. Load 20 Kg

Here is a discussion of the internal forces that occur due to a 20 kg load.


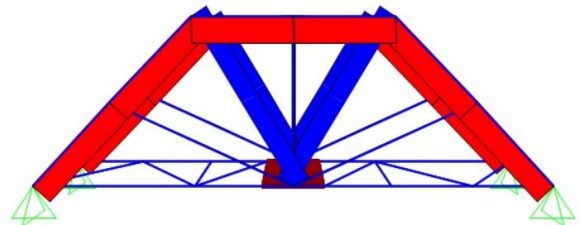


Figure 9. Normal Force (Axial) Diagram Due to Load 20 Kg

Beam with maximum axial force due to a 20 kg load with details as shown in figure 10 below.

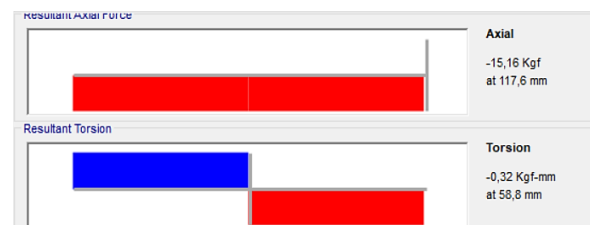

(a)

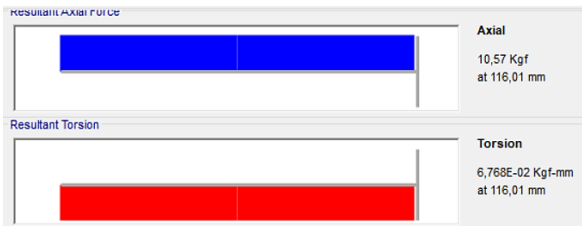


Figure 10. (a) Compression (b) Tension Due to Load 20 Kg

Based on Figure 10, the results show a maximum compressive axial force of -15.16 Kgf at a position of 117.6 mm and a maximum tensile axial force of 10.57 Kgf at a position of 116.01 mm. This indicates a small but significant compressive force on the axial axis, where the structure is experiencing a compressive force that needs to be considered for further calculations.

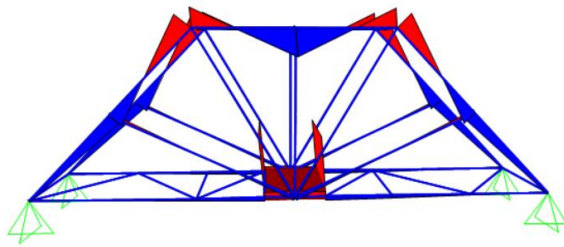


Figure 11. Moment Diagram Due to Load 20 Kg

Beam with maximum moment due to a 20 kg load with details as shown in figure 12 below.

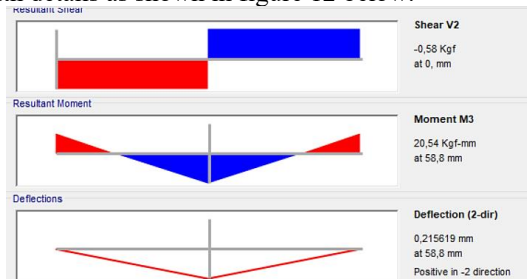


Figure 12. Maximum Moment Due to Load 10 Kg

Based on figure 12, the structure experiences a maximum bending moment of 20.54 Kgf-mm at the 58.8 mm position. Overall, the structure is able to withstand these forces well and remains within safe limits for balsa wood.

3. Load 30 Kg

Here is a discussion of the internal forces that occur due to a 30 kg load.



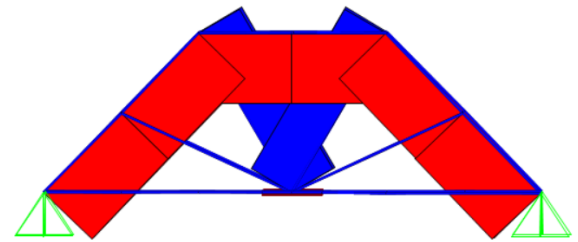


Figure 13. Normal Force (Axial) Diagram Due to Load 30 Kg

Beam with maximum axial force due to a 30 kg load with details as shown in figure 14 below.

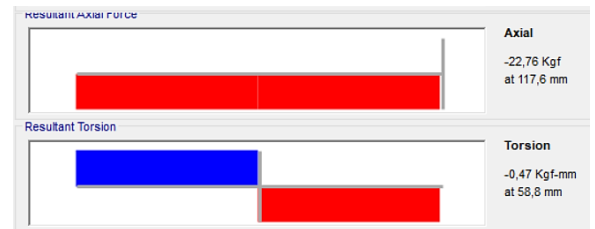

(a)

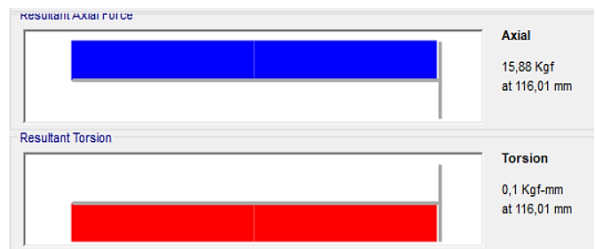

(b)

Figure 14. (a) Compression (b) Tension Due to Load 30 Kg

Based on Figure 14, the results show a maximum compressive axial force of -22.76 Kgf at a position of 117.6 mm and a maximum tensile axial force of 15.88 Kgf at a position of 116.01 mm. This indicates a small but significant compressive force on the axial axis, where the structure is experiencing a compressive force that needs to be considered for further calculations.

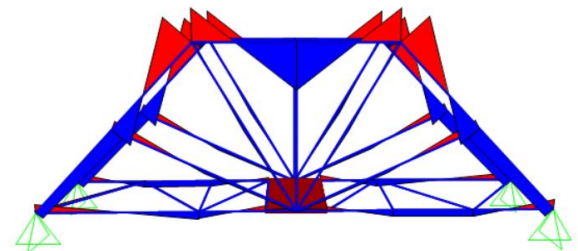


Figure 15. Moment Diagram Due to Load 30 Kg

Beam with maximum moment due to a 30 kg load

with details as shown in figure 16 below.

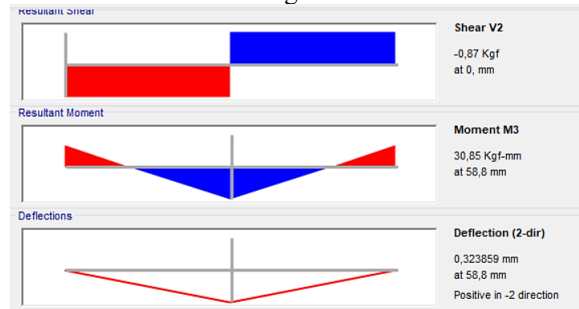


Figure 16. Maximum Moment Due to Load 10 Kg

Based on figure 16, the structure experiences a maximum bending moment of 30.85 Kgf-mm at the 58.8 mm position. Overall, the structure is able to withstand these forces well and remains within safe limits for balsa wood.

4. Comparison of modeling results

Modeling has been completed, followed by a comparative analysis of the results (model with a load of 10, 20, 30 kg). The purpose of the comparison is to determine the differences in the values of axial force and moment across three (3) modeling variations. The results of this comparative analysis are shown in the graph and table figures, including Table 3, Figures 7, and 8.

Table 3. Test output of bridge load testing using software.

No.	Output	Load (Kg)		
		10	20	30
1.	Max. Compression Force (Kgf)	-7,6	-15,16	-22,76
2.	Max. Tension Force (Kgf)	5,3	10,57	15,88
3.	Max. Moment (Kgf.mm)	10,3	20,54	30,85

Here is the graph based on the data in table 3.

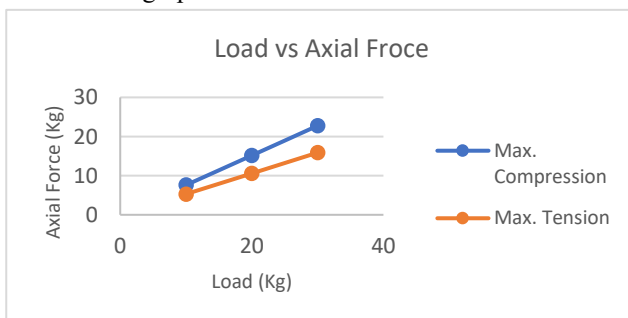


Figure 7. Comparison Graph of Load vs Axial Force

Based on Figure 7, it can be seen that the axial force, both compressive and tensile, increases with the increasing load. This indicates a correlation between the axial force value and

the load carried.

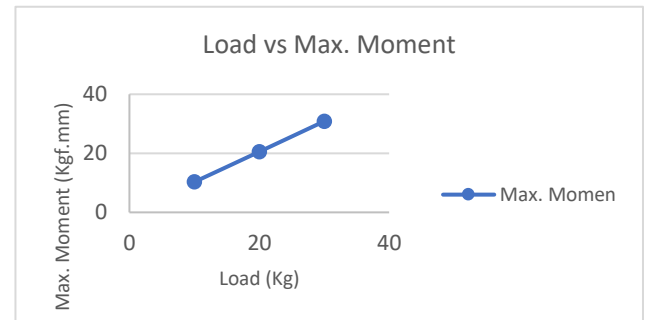


Figure 8. Comparison Graph of Load vs Moment

Based on Figure 8, it can be seen that the moment value increases with the increase in the applied load. This indicates a good correlation between the moment value and the load being carried.

• Experimental

Constructing a balsa wood bridge is not an easy task. It is quite time-consuming and requires a complex process, thus demanding meticulous planning, careful execution, and periodic evaluation. The stages begin with assembly, checking the frame's specifications and weight, and end with testing.

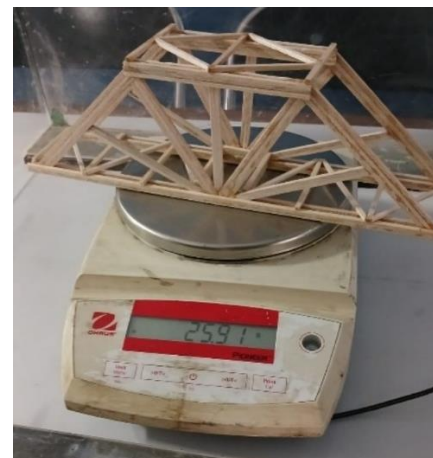


Figure 9. Weight of the Bridge

Based on Figure 9, the bridge's weight was 25.91 gr. The bridge's dimensions were then checked by measuring it with a ruler, and the bridge could be passed through by a wooden block measuring 80 mm x 40 mm with a length of 300 mm.



Figure 10. Pengecekan Dimensi Jembatan

Based on figure 10, the bridge dimensions obtained are a span of 320 mm, a height of 100 mm, and a width of 68 mm, which meet the specifications. After this, a load test can be performed on the bridge.

The Load Testing stage is conducted to determine the maximum load capacity of the bridge. This process is carried out by suddenly attaching a hooking mechanism, consisting of a plate and a bucket (initial weight of ± 1 kg). Subsequently, the load is added gradually (500 grams per measure) into the bucket every 5 seconds. The test ends when the bridge collapses.



Figure 11. Load Testing Phase

Based on image 11, the bridge was able to withstand a load of 30.09 Kg. This is in accordance with the design that was modeled in the structural software. Furthermore, from this test, the effectiveness value of the bridge truss can be calculated.

$$Effectiveness = \frac{Max.Load}{Bridge Weight} \quad (3)$$

$$Effectiveness = \frac{30090 \text{ gram}}{25,91 \text{ gram}} = 1161,327$$

Based on the efficiency value calculation, it can be interpreted that the bridge is able to withstand 1161.327 times its own weight.

Conclusion

Based on research regarding bridge planning with balsa

wood material, several important points about bridge planning were concluded. Among them is an innovative design where the entire framework of the bridge is centered on one main joint in the middle. This innovation makes the bridge more stable, as the forces from each frame are distributed evenly toward a single central point. This central joint not only serves to connect the frames but also acts as the main load distributor, allowing the bridge to withstand greater loads with maximum efficiency.

Based on the modeling of the three types of loads, it can be concluded that the greater the load carried, the greater the external forces that occur, both axial and moment. This means that the bridge truss will also experience greater deformation. Experimentally, the balsa bridge could withstand a load of 30.90 kg before it eventually collapsed.

If viewed from its efficiency value, it can be interpreted that the bridge is able to withstand 1161.327 times its own weight.

Reference

- [1] D. F. Lili, "Alternatif Perencanaan Struktur Atas Jembatan Rangka Baja Tipe Camel Back Truss Dengan Menggunakan Metode LRFD Di Weutu Kota Atambua, Kab. Belu. Provinsi NTT.," *e-journal Perencanaan Jembatan Rangka Baja*, vol. 3, no. 02, pp. 17–24, 2019.
- [2] Bambang. Supriyadi and A. S. Muntohar, "Jembatan (Edisi Pertama)," *Jembatan*, pp. 1–244, 2007.
- [3] A. Murtono, A. Sandhyavitri, and Z. Djauhari, "Analisis Jembatan Kayu Komposit Berbasis Material dan Kearifan Lokal (Studi Kasus : Kabupaten Indragiri Hilir)," *Jurnal Selodang Mayang*, vol. 5, no. 2, pp. 6–16, 2019, [Online]. Available: <https://ojs.selodangmayang.com/index.php/bappeda/article/view/123>
- [4] A. Astasari, S. Sutikno, and W. Wijanarko, "Bending and Torsional Characteristics of Carbon Fiber and Balsa Wood Sandwich Composite," *IPTEK Journal of Proceedings Series*, vol. 0, no. 2, p. 5, 2017, doi: 10.12962/j23546026.y2017i2.2270.
- [5] S. Suryansyah, J. Purnomo, and F. Kamil, "Perencanaan Jembatan Kayu di Jalan Pertanian Desa Mekar Sari Kecamatan Benua Kayong Kabupaten Ketapang," *Journal of Research and Inovation in Civil Engineering as Applied Science (RIGID)*, vol. 1, no. 2, pp. 36–41, 2022, doi: 10.58466/rigid.v1i2.1186.
- [6] Maksum Tanubrata, "Bahan - Bahan Konstruksi Dalam Konteks Teknik Sipil," *Jurnal Teknik Sipil*, vol. 11, pp. 132–154, 2015, doi: <https://doi.org/10.28932/jts.v11i2.1407>.
- [7] PKKI NI-5, "Peraturan Konstruksi Kayu Indonesia,"

- 1961.
- [8] Nurjanah and H. Nikmatul, “Efektivitas dan Efisiensi Jembatan Rangka Kayu Sebagai Alternatif Rangka Jembatan Pejalan Kaki,” *PROKONS: Jurnal Teknik Sipil*, vol. 15, no. 2, pp. 34–41, 2016, [Online]. Available: prokons.polinema.ac.id
 - [9] M. R. Setiadi, H. Abdillah, and D. Agustine, “Pengujian Kayu Balsa untuk Struktur Jembatan,” *Jurnal Ilmiah Fakultas Teknik*, vol. 2, no. 1, pp. 14–22, 2021, [Online]. Available: <http://ejournal.unis.ac.id/index.php/jimtek/article/view/1319>
 - [10] E. S. Jang and C. W. Kang, “Porosity analysis of three types of balsa (*Ochroma pyramidale*) wood depending on density,” *Journal of Wood Science*, vol. 68, no. 1, pp. 10–15, 2022, doi: 10.1186/s10086-022-02037-2.
 - [11] M. Tüfekci *et al.*, “Low strain rate mechanical performance of balsa wood and carbon fibre-epoxy-balsa sandwich structures,” *Composites Part C: Open Access*, vol. 12, no. November, 2023, doi: 10.1016/j.jcomc.2023.100416.
 - [12] A. N. Fajarwati, Y. S. Yoganata, and A. M. Kurniawan, “Analisis Struktur Omah Saka Papat di Blitar Terhadap Risiko Beban Gempa,” vol. X, no. 3, pp. 13711–13721, 2025.
 - [13] SNI 03-6848, “SNI 03-6848-2002 Metode pengujian berat jenis batang kayu dan kayu struktur bangunan,” *Badan Standarisasi Nasional BSN*, p. 3, 2002.
 - [14] BSN, “SNI 7973-2013 Spesifikasi Desain untuk Konstruksi Kayu,” *Bsn*, p. 334, 2013, [Online]. Available: www.bsn.go.id
 - [15] Y. S. Yoganata, K. Purwitasari, K. N. Cahyani, and A. N. Fajarwati, “Analisis Nilai Tegangan Terhadap Variasi Cekungan pada Pelat Baja Menggunakan Finite Element Method,” vol. X, no. 2, pp. 13080–13090, 2025.